



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number : **0 566 301 A1**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number : 93302672.6

(51) Int. Cl.⁵ : **B65D 83/00, B43M 11/08**

(22) Date of filing : 06.04.93

(30) Priority : 14.04.92 JP 94305/92

(43) Date of publication of application :
20.10.93 Bulletin 93/42

(84) Designated Contracting States :
BE DE ES FR GB IT LU NL SE

(71) Applicant : **SEKISUI-KO COMPANY LTD.**
6, Kandatsukasa-cho 2-chome
Chiyodaku Tokyo (JP)


(72) Inventor : **Otake, Masaaki**
82-8 Plaza
Ohmiya-shi, Saitama-ken (JP)

(74) Representative : **Carter, Gerald et al**
Arthur R. Davies & Co. 27 Imperial Square
Cheltenham, Gloucestershire GL50 1RQ (GB)

(54) **Double-structured package of one-shot-push squeeze-out type of adhesive.**

(57) A double-structured package (A) which is for an adhesive and can be subjected to one-shot pushing to squeeze out the adhesive from the package. The package comprises a soft elastic container (1) in which the adhesive is stored; a soft elastic case (2) housing the container except at least the outlet port (1e) of its front end so that the case (2) can be pushed from outside to press the container (1) to squeeze out the adhesive from it through the outlet port (1e); and a cap (3) removably fitted on the case (2) so that the cap (3) covers the outlet port (1e) of the container (1) and the head of the case (2).

Fig.1

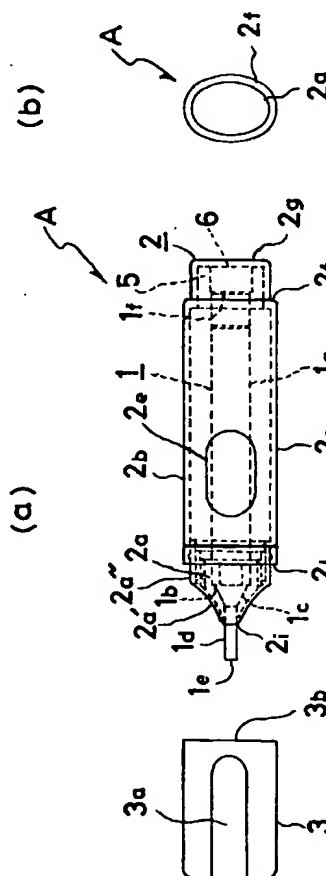

EP 0 566 301 A1

Field of the invention

The present invention relates to an improved double-structured package which is for an adhesive, particularly an instantly-set adhesive, and can be subjected to one-shot pushing to squeeze out the adhesive from the package to apply the adhesive to the desired part of an object.

Background of the invention

When a conventional container for an adhesive is to be put away, a container cap is fitted on the container, they are then put in a case, and a case cap is thereafter fitted on the case. When the adhesive is to be squeezed out from the container, the case cap is removed from the case, the container is taken out from the case, the container cap is removed from the container, and the container is then pressed to drive out a desired quantity of the adhesive from the container through the outlet port thereof. At that time, if a part of the adhesive has already set in the outlet port to hinder the squeezing-out of the adhesive, the pin of a holer provided separately from the container is stung into the set part of the adhesive to make a hole therein to render it possible to squeeze out the adhesive from the container.

Each of such conventional containers is a single-structured tube although each of some of them is a tube made of a plurality of materials overlaid together. The containers are not made of transparent materials through which the adhesive in each container can be seen to find out the amount of the adhesive. Since each of the containers is put in a case except at the time of the squeezing-out of the adhesive and taken out from the case at that time, it is troublesome to handle the container. Since a holer having a pin for making a hole in the set part of the adhesive remains simply put in a cap before the cap is removed from the case for the first time to take out the container from the case, the holer is likely to rush or drop out from the cap at the time of the removal or become lost at the time of handling or putting-away of the container. If the holer is lost in a room, it can be dangerous for a little child or the like. If the pin is stung into the container by accident or mistake, the adhesive leaks out therefrom. If the adhesive leaking out from the container clings to a finger, the adhesive can be uneasy to be wiped off it or can cause a skin inflammation in the finger.

As for a pen-like container for an adhesive, it cannot be put out from the container unless the container is pushed onto an adhesive-applied object. The adhesive is likely to be excessively put out from the container and cling to the tip of the container or a finger to cause a skin inflammation therein.

An adhesive package was filed by the present applicant, and disclosed in the Japan Utility Model

Laid-open No. 99476/1989 and the Japan Patent Application No. 914/1991. Since the constitution of the package makes it impossible to hermetically seal the adhesive container of the package, the container is exposed to the external air to accelerate the deterioration of the adhesive in the container to make it impossible to store the adhesive therein for a long time. If the adhesive is an α -cyano adhesive, it whitens due to the external air.

Summary of the invention

The present invention was made in order to solve the above-described problems of the conventional containers and package. Accordingly, it is an object of the invention to provide a double-structured package which is for an adhesive and can be subjected to one-shot pushing to squeeze out the adhesive from the package. The adhesive can be stored in the package for a long time. It is easy to handle the package to squeeze out the adhesive therefrom or put away the package. Hands are unlikely to be contaminated with the adhesive when the package is handled by the hands. Therefore, the package can be handled with safety and cleanness.

The double-structured package comprises a soft elastic container in which the adhesive is stored; a soft elastic case housing the container except at least the outlet port of the front end thereof so that the case can be pushed from outside to press the container to squeeze out the adhesive therefrom through the outlet port thereof; and a cap removably fitted on the case so that the cap covers the outlet port of the container and the head of the case.

The soft elastic case may be so transparent or translucent that the adhesive in the soft elastic container housed in the case can be seen through it to find out the amount of the adhesive.

The soft elastic case may have a desiccant chamber between the bottom of the case and that of the soft elastic container so that a desiccant can be provided in the chamber to prevent the adhesive from whitening and keep the inner surface of the case from collecting moisture, thus to heighten the adhesive preserving property of the package.

A holer having a pin may be removably fitted in the appropriate portion of the cap so that the holer does not become lost before the first squeezing-out of the adhesive and during the handling of the package. If a portion of the adhesive has set in the outlet port of the container to close the port, the pin of the holer is stung into the portion to open the port.

When the adhesive is to be squeezed out from the double-structured package and applied to an object, the cap is removed from the case and the body of the case is then pinched at the dimples thereof so as to be elastically deformed inward to press the container at the mutually opposite portions of the periph-

eral surface thereof in the case so that a quantity of the adhesive, which corresponds to the degree of the pressing, is squeezed out from the container through the outlet port of the front end thereof without directly touching the container in the case. The adhesive can thus be squeezed out from the package and applied to the object in an easy simple manner.

When the pinching the body of the case at the dimples thereof is ceased after the squeezing-out of the adhesive, an adhesive portion driven forth to the vicinity of the outlet port of the container at the time of the squeezing-out is sucked back into the container so that the adhesive portion is unlikely to drop from the outlet port or cling around it to contaminate the vicinity of the port, a finger, clothes or the like. Therefore, the container is always clean at the outlet port, and it is safe and easy to handle the package.

Although the adhesive cannot be put out from the above-mentioned conventional pen-like container without pushing it onto the object and it is therefore difficult to control the put-out quantity of the adhesive, the case and container of the double-structured package are so soft and elastic that the squeezing pressure thereon can be finely modulated to control the squeezed-out quantity of the adhesive and it can be appropriately squeezed out and applied to a deep narrow place, a ruggedly undulating place, a brittle object, a soft object or the like.

Since the adhesive can be hermetically sealed in the double-structured package so as to be completely kept off the external air, the adhesive can be stored in the package for a long time.

Since the package is double-structured, the adhesive is unlikely to leak out therefrom when the package undergoes external damage.

Description of the drawings

Fig. 1(a) is a side view of a double-structured package which is an embodiment of the present invention and is for an adhesive so that it can be squeezed out from the package by the one-shot pushing thereof as the cap of the package is removed from the other portion thereof as shown in the drawings;

Fig. 1(b) is a rear view of the package;

Fig. 2 is a plan view of the package in the state that the cap is removed from the other portion of the package;

Fig. 3 is an exploded sectional view of the soft elastic case of the package along lines III in Fig. 2, in the state that the conical head and body of the case are uncoupled from each other;

Fig. 4(a) is a side view of a cap which is a modification of that of the package;

Fig. 4(b) is a sectional view of the cap along lines IVb in Fig. 4 (c);

Fig. 4(c) is a rear view of the cap;

Fig. 5(a) is a bottom view of the latter cap; and Fig. 5(b) is a sectional view of the latter cap along lines Vb in Fig. 4(a), in the state that a holer having a pin is about to be fitted in the cap.

Description of exemplary embodiment

An embodiment of the present invention is hereafter described in detail with reference to the drawings attached hereto.

Figs. 1(a), 1(b), 2 and 3 show a double-structured package A which is the embodiment and is for an adhesive which can be squeezed out from the package by the one-shot pushing of the package. The package A includes a soft elastic container 1 in which the adhesive is stored; a soft elastic case 2; a cap 3; a desiccant chamber 5; and desiccant 6.

The container 1 is made of a soft elastic material which is polyethylene or polypropylene if the adhesive is an α -cyano adhesive. The container 1 includes a cylindrical body 1a, a shoulder 1b, a conical neck 1c, a thin tubular portion 1d, through which the adhesive is squeezed out from the container, an outlet port 1e, through which the adhesive is squeezed out from the container, and a bottom 1f. The conical neck 1c tapers from the shoulder 1b to the thin tubular portion 1d. The outlet port 1e is provided in the thin tubular portion 1d at the front end thereof, and is closed until the start of the first squeezing-out of the adhesive so that the port can be opened by a holer 4 having a pin 4a and shown in Figs. 4(a), 4(b), 5(a) and 5(b), scissors or the like.

The case 2 is made of a soft elastic material. It is preferable that the case is transparent or translucent to make it possible to see through the case. The case 2 may be colored and translucent, and also be transparent indoors and translucent due to sunlight outdoors. For example, the material is polyacetal, polyacrylonitrile, polyethylene, polypropylene, polyethylene terephthalate, polyvinyl chloride, polyvinylidene chloride, nylon, or the like. The case 2 includes a conical head 2a, and a body 2b. The main portion 2c of the body 2b is a cylindrical bottomed hollow portion having an elliptic cross section, and has finger engagement dimples 2e in the peripheral surface of the portion so as to make it easy for fingers to pinch the portion. The body 2b has a shoulder 2d, a step 2f, a bottom 2g, a cylindrical portion 2h, a neck 2m, and an annular projection 2n. The neck 2m adjoins the main portion 2c at one end of the neck, and the cylindrical portion 2h at the other end of the neck, and is smaller in outside diameter than the main portion but larger in outside diameter than the cylindrical portion. The portion of the body 2b, which extends from the step 2f to the bottom 2g, is a cylindrical portion smaller in outside diameter than the main portion 2c, and has the desiccant chamber 5 between the bottom 2g and that 1f of the container 1. The desiccant 6 is provided

In the chamber 5. The chamber 5 and the desiccant 6 may not be provided if they are not necessary.

The conical head 2a of the case 2 tapers forward from the body 2b thereof, and has an opening 2i through which the thin tubular portion 1d of the container 1 housed in the case extends forward. The head 2a has a collar 21 having an elliptic cross section of the same form and size as the body 2c of the case, an inner ring 2k, and an annular groove 2j defined between the outer circumferential surface of the ring and the inner circumferential surface of the head. When the head 2a and the body 2b are assembled to constitute the case 2, the collar 21 adjoins the shoulder 2d of the body, the cylindrical portion 2h of the body is fitted on the neck 2m and in the annular groove 2j, and the annular projection 2n is firmly engaged in the collar.

The cap 3 is made of the same material as the case 2, and has an elliptic cross section of the same size as the front end of the body 2b of the case, and a clip 3a. The cap 3 has such a thickness that it can be either fitted on the elliptic outer circumferential surface of the head 2a of the case 2 or removed therefrom.

When the adhesive is to be squeezed out from the container 1, the cap 3 is first picked and pulled by the thumb and index finger of a hand so that the cap is removed from the head 2a of the case 2. As a result, the thin tubular portion 1d of the container 1 is exposed at the outlet port 1e thereof. If the adhesive is to be squeezed out for the first time, the pin 4a of the holer 4 is stung into the thin tubular portion 1d at the front end thereof or the portion is cut off at the front end thereof, so that the outlet port 1e is created. The holer 4 includes a hollow cylindrical body 4c having a circular cross section, a knob flange 4b extending from the body, larger in outside diameter than it and having an anti-slipping peripheral surface, and the pin 4a extending from the inside surface of the flange and projecting slightly out of the open end of the body. The outlet port 1e is then located at the desired portion of an object to which the adhesive is to be applied. The main portion 2c of the body 2b of the soft elastic case 2 is thereafter pinched by the thumb and index finger of another hand in the dimples 2e of the main portion to elastically deform it to press the body 1a of the soft elastic container 1 housed in the case. As a result, the peripheral surface of the body 1a of the container 1 is depressed so that the adhesive stored therein is squeezed out from the container through the outlet port 1e thereof and applied to the desired portion of the object. At that time, the squeezed-out quantity of the adhesive can be finely modulated in terms of the degree of the pinching of the case 2 at the dimples 2e thereof.

After the adhesive is thus squeezed out from the container 1, pinching the main portion 2c of the body 2b of the case 2 is ceased so that the container and

the case restore their original forms due to their elasticity. At that time, the adhesive in the thin tubular portion 1d is sucked back into the body 1a of the container 1 so that the adhesive is prevented from dropping out from the outlet port 1e or clinging around it. The pin 4a of the holer 4 is thereafter pushed into the thin tubular portion 1d through the port 1e so that the cylindrical body 4c of the holer is tightly fitted on the front end of the thin tubular portion to hermetically close the port. The cap 3 is then pushed onto the case 2 until the bottom of the cap comes into contact with the collar 21 of the head 2a of the case. The case 3 is thus firmly fitted on the case 2 at the head 2a thereof. To squeeze out the adhesive from the container 1 next time, the cap 3 is removed again from the head 2a of the case 2, and the pin 4a of the holer 4 is then pulled out from the outlet port 1e of the container 1 to open the port.

When the emptied container 1 is to be replaced with a full one, the head 2a of the case 2 is detached from the body 2b thereof and the full container is then fitted in the case.

Shown at 2a' and 2a'' in Figs. 1(a) and 2 are the outer elliptic circumferential surfaces of the anterior and intermediate portions of the conical head 2a of the case 2, respectively.

Figs. 4(a), 4(b), 4(c), 5(a) and 5(b) show a cap 3' which is a modification of the former 3 and is larger in length than it. The cap 3' has a recess 7 at the center of the head of the cap. When the holer 4 is not used, it can be removably fitted in the recess 7 so as not to become lost.

The present invention is not confined to the above-described embodiment and modification, but may be embodied or practiced in other various ways without departing from the spirit or essential character of the invention. For example, although the cross section of each of the case 2 and the caps 3 and 3' is elliptically shaped, it may be otherwise shaped.

Claims

1. A double-structured package which is for an adhesive and can be subjected to one-shot pushing to squeeze out said adhesive from said package, comprising a soft elastic container in which said adhesive is stored; a soft elastic case housing said container except at least the outlet port of the front end thereof so that said case can be pushed from outside to press said container to squeeze out said adhesive therefrom through said port; and a cap removably fitted on said case so that said cap covers said port and the head of said case.
2. A double-structured package according to the claim 1, wherein the soft elastic case is so trans-

parent or translucent that the adhesive in the soft elastic container housed in said case can be seen through it to find out the amount of said adhesive.

5

3. A double-structured package according to the claim 1 or 2, wherein the soft elastic case has a desiccant chamber between the bottom of said case and that of the soft elastic container so that a desiccant can be provided in said chamber.

10

4. A double-structured package according to the claim 1, 2 or 3, wherein a holder having a pin is removably fitted in the appropriate portion of the cap.

15

20

25

30

35

40

45

50

55

5

Fig.1

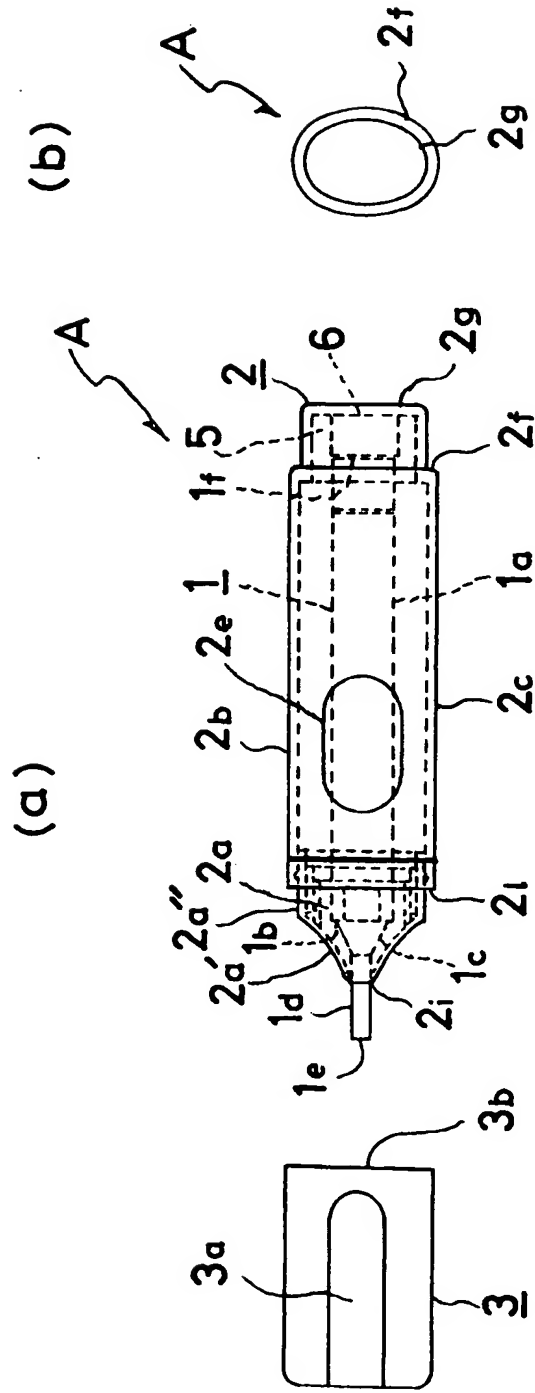


Fig.2



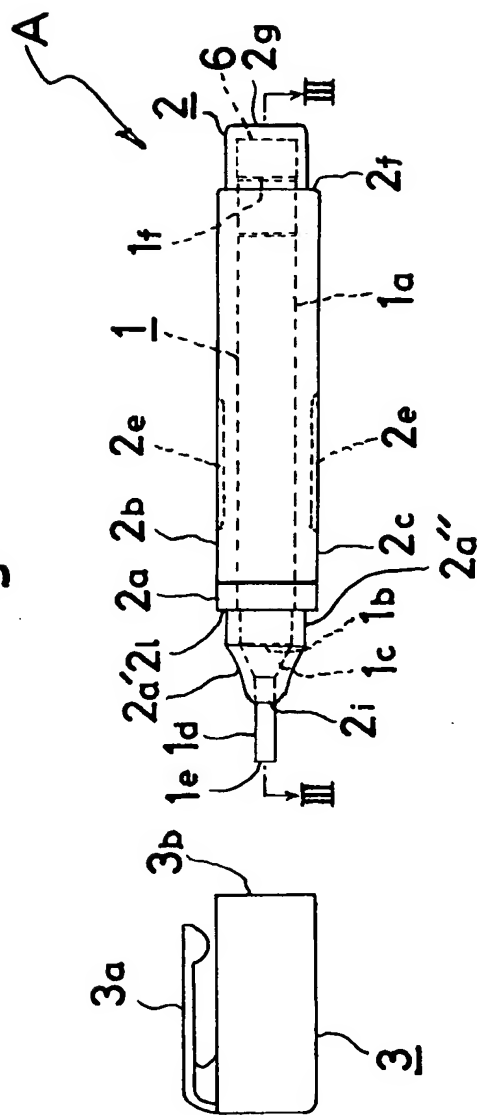


Fig.3



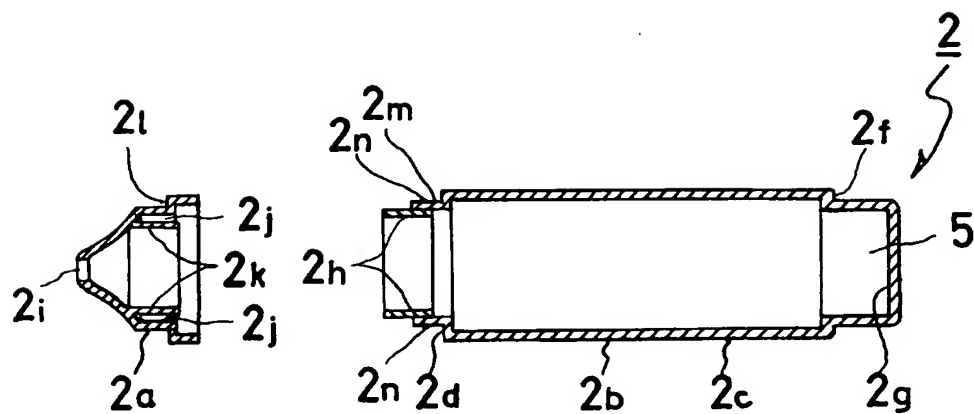

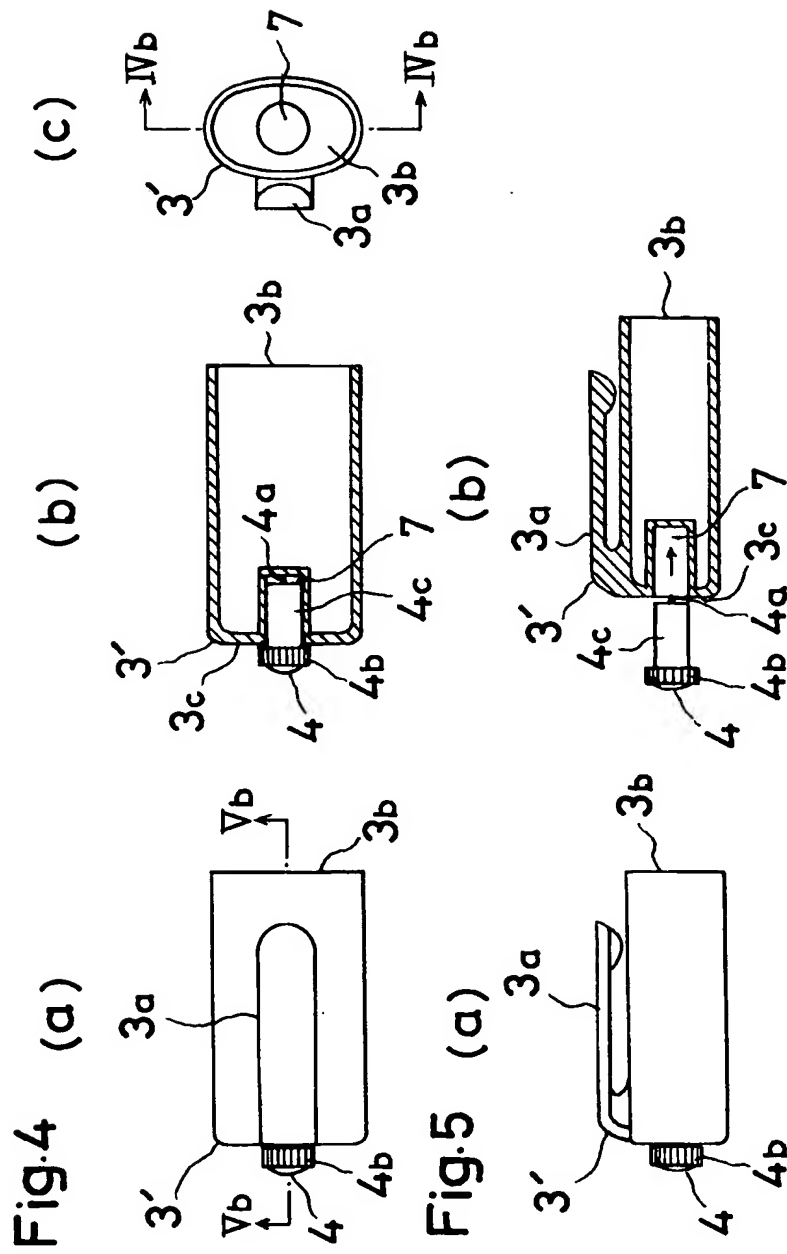

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 93 30 2672

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X Y	EP-A-0 367 874 (SEKISUI-IKO) * column 3, line 24 - column 6, line 8; figures 1-617-20 *	1 2,4	B65D83/00 B43M11/08
X	FR-A-2 389 419 (SZCZEPANSKI) * page 3, line 32 - page 4, line 38 * * page 7, line 1 - line 18; figures 1-5,20,21 *	1	
Y A	US-A-4 389 132 (VALADEZ) * column 1, line 63 - column 2, line 12; figures 1,2,4 *	2 1	
Y A	EP-A-0 155 471 (COLPO) * page 3, line 1 - page 4, line 26; figures 1,2,3A,3B *	4 1	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			B65D B43K A47K B43M
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 01 JULY 1993	Examiner BARBAS A.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application I : document cited for other reasons @ : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (01.92) (P0001)